



**MATERIALS**  
JULY 6-8, 2026 | BOSTON, MA

7<sup>th</sup> INTERNATIONAL CONFERENCE ON  
**MATERIALS  
SCIENCE &  
ENGINEERING**



July 6-7, 2026 | Boston, MA  
July 8, 2026 | Online, Zoom



Four Points by Sheraton Wakefield  
Boston Hotel & Conference Center  
One Audubon Rd, Wakefield, MA

**ABSTRACT BOOK**

PUBLICATION PARTNER



materials@uniscigroup.net

<https://materials.unitedscientificgroup.org/>



Organized by  
**UNITED** Scientific  
Group  
A non-profit organization

7<sup>th</sup> International Conference on  
**Materials Science and Engineering**

July 06-08, 2026 | Boston, MA | Hybrid

## Keynote Session

### Improving Mechanical Properties of Carbon Fiber Reinforced Epoxy Laminate, Its Self-Healing and Recycling

Subodh Kumar\*, Samir Mandal, Suryasarathi Bose

*Department of Materials Engineering, Indian Institute of Science, Bangalore, India*

#### Abstract

In this work, mechanical properties of a carbon fiber reinforced epoxy (CFRE) laminate are significantly improved and self-healing properties are imparted to it. This laminate is also successfully recycled using our proprietary environment friendly solution SalSO™. A polyetherimide termed as BA is prepared by mixing 4,4'-(4,4'- Isopropylidenediphenoxy) bis(phthalic anhydride) (BPADA) and 4-Aminophenyl disulfide (AFD). A functionalized graphene oxide termed as hGO is also prepared. hGO is tagged to BA, termed as BAhGO. Carbon fiber (CF) reinforcement is sized with a small amount of BAhGO, and a small amount of hGO is dispersed in epoxy (Ep) matrix. The resultant laminate termed as BAhGO-CFRE-hGO exhibits 44% increase in flexural strength (FS) and 41% increase in interlaminar shear strength (ILSS) over neat CFRE laminate. It also exhibits 61% self-healing efficiency in ILSS. BAhGO-CFRE-hGO laminate is dissolved in SalSO™ with almost 100% recovery of matrix Ep, termed as rEp, and reinforcement CF, termed as rCF. rEp is used as hardener for Ep, and the resultant epoxy, termed as Ep-rEp, exhibits 3% higher tensile strength than epoxy prepared using conventional hardener. The laminate fabricated by using Ep-rEp matrix, termed as Ep-rEp-CFRE, exhibits 17% higher FS and 13% higher ILSS than CFRE prepared using Ep matrix.



Organized by  
**UNITED** Scientific  
Group  
A non-profit organization

7<sup>th</sup> International Conference on  
**Materials Science and Engineering**

July 06-08, 2026 | Boston, MA | Hybrid

## Keynote Session

### **Microstructure Characterization for Failure Analysis of Polymer Matrix Composites with Manufacturing Defects**

Ramesh Talreja

*Department of Aerospace Engineering, Department of Materials Science and Engineering, Texas A&M University, College Station, Texas 77843, USA*

#### **Abstract**

Polymer matrix composites are manufactured by a variety of methods, ranging from labor-intensive hand layups to fully automated techniques employing robotics. Depending on the degree of control in the manufacturing process different defects appear in the final product. These defects can be described as deviations from the intended morphology of the internal structure of a composite. Examples are nonuniform fiber distribution and fiber misalignment, imperfect fiber-matrix bonding, and matrix voids. All such defects can be initiators of local damage that can lead to deterioration of the composite performance. This presentation will discuss a strategy for performance evaluation of composite structures accounting for the severity of manufacturing defects. A statistical methodology for construction of representative volume elements combined with local stress and failure analysis applicable to polymers will be presented. Certain fundamental issues concerning descriptors of randomness and nonuniformity will also be addressed.



Organized by  
**UNITED** Scientific  
Group  
A non-profit organization

7<sup>th</sup> International Conference on  
**Materials Science and Engineering**

July 06-08, 2026 | Boston, MA | Hybrid

## Keynote Session

### Treating Cancer Through a One Medicine Vision

Ashish Ranjan

*The University of Texas Southwestern Medical Center, TX, USA*

#### **Abstract:**

The successful translation of emerging cancer therapeutics and their combination with therapeutic devices remains limited by the inability of conventional preclinical models to fully capture the biological complexity of human disease. The One Medicine paradigm addresses this challenge by integrating naturally occurring cancers in companion animals into the translational pipeline, creating a continuum between laboratory discovery and human clinical investigation. At the University of Texas Southwestern, we have established a multidisciplinary One Medicine program that integrates engineering, comparative oncology, immunology, and clinical oncology to investigate high-intensity focused ultrasound (HIFU) as a platform for improving cancer therapy. Rather than serving solely as a local ablative modality, HIFU is being explored as a versatile tool capable of enhancing intratumoral drug delivery, improving the performance of nanoparticle- and liposome-based therapeutics, promoting antigen release, and augmenting anti-tumor immune responses. By leveraging distinct HIFU modalities, including mild hyperthermia, thermal ablation, and histotripsy, we seek to define how acoustic energy can be tailored to maximize therapeutic efficacy while minimizing normal tissue injury. This talk will provide insights into how the One Medicine approach is accelerating the development of HIFU-enabled combination therapies and advancing more effective chemo-immunotherapy strategies for both veterinary and human cancer patients.



Organized by  
**UNITED** Scientific  
Group  
A non-profit organization

7<sup>th</sup> International Conference on  
**Materials Science and Engineering**

July 06-08, 2026 | Boston, MA | Hybrid

## Keynote Session

### **Intrinsic Topological Weyl Phase Transition Induced by a Magnetostructural Transformation in a Kagome Magnet**

Qiang Zhang<sup>1</sup>, Tsung-Han Yang<sup>1</sup>, Satoshi Okamoto<sup>2</sup>, D. Alan Tennant<sup>3,4,5</sup>, Michael A. McGuire<sup>2</sup>

<sup>1</sup>*Neutron Scattering Division, Oak Ridge National Laboratory, Oak Ridge, Tennessee 37831, USA*

<sup>2</sup>*Materials Science & Technology Division, Oak Ridge National Laboratory, Oak Ridge, Tennessee 37831, USA*

<sup>3</sup>*Department of Physics & Astronomy, University of Tennessee, Knoxville, TN, USA*

<sup>4</sup>*Shull Wollan Center, Oak Ridge National Laboratory, Oak Ridge, TN 37831, USA*

<sup>5</sup>*Department of Materials Science and Engineering, University of Tennessee, Knoxville, TN, USA*

#### **Abstract**

Topological phase transitions provide a unique window into the interplay between structure, magnetism, and Weyl physics in magnetic Weyl semimetals. However, realizing an intrinsic Weyl phase transition between two distinct Weyl states near room temperature remains challenging. Here, we demonstrate that a magnetostructural transition effectively induces such a transition in the kagome magnet  $\text{Mn}_3\text{Ga}$ . High-resolution neutron diffraction, magnetization characterizations and first-principles calculations reveal that  $\text{Mn}_3\text{Ga}$  undergoes a chiral antiferromagnetic transition below 485 K, followed by a magnetostructural transition to a monoclinic structure with highly canted antiferromagnetic order near room temperature. These cooperative changes in lattice and magnetic symmetries reorganize Weyl nodes, driving a transition from a primary type-II Weyl state to a distinct Weyl state, accompanied by dramatic variations in the anomalous Hall effect and appearance of topological Hall effect. Our findings open a new pathway for discovering novel topological Weyl states and potential spintronic Applications.

**In press Publication:** <https://www.nature.com/articles/s41467-026-71683-7>

## Keynote Session

### Mechanistic Underpinnings of Polysulfide Formation and Evolution of Interfacial SEI Layer During Li-S Interaction: Effect of Catalysts and Electrolyte Additives

Sanjeev Mukerjee<sup>\*</sup>, Huidong Dai

Department of Chemistry and Chemical Biology, Northeastern University, 360 Huntington Avenue, Boston 02115, USA

#### Abstract

The li-S battery concept is promising for the subsequent generation of energy storage due to its distinct advantage of high theoretical capacity (1675 mA/g) and energy density (2600 Wh/gm). Yet the formation of polysulfides as intermediate discharge products ( $\text{Li}_2\text{S}_n$ ,  $4 < n < 8$ ) and their dissolution result in the loss of active material and ultimate deposition at the anode. This shuttle phenomenon gives rise to irreversible loss of active material, rapid capacity fading, low coulombic efficiency and short cycle life with an ambiguity of its mechanism. To our knowledge, we are the first to employ in-situ characterization techniques, including Raman spectroscopy and X-ray absorption spectroscopy (XAS), to investigate the evolution of kinetics with various electrolyte systems. This work presented the formation change of polysulfide intermediates at various fluorinated additives environments with different formulas and compositions based on *in-situ/operando* Raman spectroscopy. The Raman results revealed that the long-chain polysulfide conversion ( $400 \text{ cm}^{-1}$ ) was pushed forward, and an increase in the concentration of short-chain polysulfide ( $453 \text{ cm}^{-1}$ ) appeared when fluorinated carboxylate ester-based electrolyte was used at its optimized formula compared to the baseline. Cyclic voltammetry results correspond to the chemistry evolution proposed by Raman. *In-situ* X-ray absorption spectroscopy was also conducted on the sulfur K-edge to monitor the polysulfide intermediates' formation. X-ray fluorescence mapping (XRF) on the cathode and anode also confirmed that the sulfur shuttle phenomenon was significantly suppressed in fluorinated carboxylate ester-based electrolytes by changing the sluggish kinetics. This presentation will also show results of catalytic effect of single atom catalysts in the form of transition metal coordinated with nitrogen embedded in a carbon matrix hereby referred to as M-N-C catalyst. Sulfur interactions with metal center will be presented both from the point of view of in situ/operando Raman and x-ray absorption data using tender x-ray facility at the National Synchrotron Light Source-II at Brookhaven National Laboratory (Upton, NY).

#### Acknowledgement:

The authors acknowledge the financial support under the auspices of the NSF-IUCRC program (Grant No IIP-2052796) and the US Department of Energy grant from the Vehicle Technology Office (Grant No DE-EE0009646) lead by Giner Inc., Authors also gratefully acknowledge sponsorship from the Army Research Office under the auspices of the Defense University Research Instrumentation Program (W911NF2010145). This research used 8-BM beamline of the National Synchrotron Light Source II (NSLS-II), a U.S. Department of Energy (DOE) Office of Science User Facility operated for the DOE Office of Science by Brookhaven National Laboratory under Contract No. DE-SC0012704.



Organized by  
**UNITED** Scientific  
Group  
A non-profit organization

7<sup>th</sup> International Conference on  
**Materials Science and Engineering**

July 06-08, 2026 | Boston, MA | Hybrid

## Keynote Session

### Next Generation Systems for Meeting the High Energy Density Challenge

Prashant N. Kumta<sup>1,2,3\*</sup>, Oleg I. Velikokhatnyi<sup>1</sup>, Mayur Gaikwad<sup>1</sup>, Samhita Pappu<sup>1</sup>, George E. Blomgren<sup>4</sup>

<sup>1</sup>*Department of Bioengineering, University of Pittsburgh, USA*

<sup>2</sup>*Department of Chemical and Petroleum Engineering, University of Pittsburgh, USA*

<sup>3</sup>*Department of Mechanical Engineering and Materials Science, University of Pittsburgh, USA*

<sup>4</sup>*Blomgren Consulting, Inc., USA*

#### Abstract

Energy storage is currently the main engine vital for an energy independent global economy currently still very much dependent on exploiting into the earth's natural reserves aided by natural oil and gas exports. The Li-ion battery chemistry has emerged at the forefront of secondary rechargeable battery systems and has witnessed burgeoning and significant research activity ever since the commercialization of the first Li-ion battery in 1990. There have been alarming advances in all areas of cathodes, anodes, and electrolytes. Despite much progress, lithiated transition metal oxides and carbon remain the ideal mainstream systems that have made it into the commercial systems deployed in electric vehicles (EVs) at present. The search for higher energy density systems has drawn the attention of Li-air and Li-S systems, recently. The Li-S systems are of particular interest due to the potential of achieving 500 Wh kg<sup>-1</sup>, a "holygrail" in energy density for next generation EVs matching and exceeding the performance metrics of the internal combustion engine (ICE). This presentation will discuss all the materials challenges in generating high-energy density cathodes and anodes as well as electrolyte additives to meet the grand challenge of 500 Whkg<sup>-1</sup>. Efforts made in the areas of new sulfur confinement materials with ability to confine high sulfur loadings combined with unique electrocatalysts exhibiting the propensity to trap polysulfides while also catalyzing the formation of Li<sub>2</sub>S will be discussed. Concurrently, research directions in generating new dendrite-free anodes, and current collectors as well as electrolyte additives matching the cathode performance will be outlined.



Organized by  
**UNITED** Scientific  
Group  
A non-profit organization

7<sup>th</sup> International Conference on  
**Materials Science and Engineering**

July 06-08, 2026 | Boston, MA | Hybrid

## Keynote Session

### **Integrated Photovoltaic and Photothermal Strategies for Continuous Energy Harvesting from Sunlight and Indoor LED Lighting in Buildings**

Anudeep Katepalli<sup>1</sup>, Thiraj Mohankumar<sup>1</sup>, Meher Saketh Gandharapu<sup>1</sup>, Sagar Shrestha<sup>2</sup>, Anton Harfmann<sup>1</sup>, Mathias Bonmarin<sup>2</sup>, John Krupczak<sup>3</sup>, Donglu Shi<sup>1\*</sup>

<sup>1</sup>College of Engineering and Applied Science, University of Cincinnati, USA

<sup>2</sup>Zurich University of Applied Sciences, Switzerland

<sup>3</sup>Dept. of Engineering, Hope College, USA

#### **Abstract**

This study integrates photovoltaic (PV) and photothermal strategies to enable continuous energy harvesting from sunlight and indoor lighting, addressing limitations of conventional solar systems in urban environments. Semitransparent CdTe PV cells with average visible transmittance (AVT) of 40–80% demonstrated power conversion efficiencies (PCEs) under LED illumination comparable to sunlight, with a stacked five-panel configuration reaching 20.51% PCE. Silicon-based PV (Si PV) panels under low-intensity indoor LED lighting ( $\sim 1.4 \text{ mW/cm}^2$ ) achieved PCEs up to 31% and photon recycling efficiencies of 37.23%, producing cumulative energy outputs of 0.19 kWh (series) and 0.32 kWh (parallel) over 20 hours. Indoor LEDs provide a continuous, diffuse, underutilized energy source, captured by semitransparent PV panels integrated into building facades and windows, supporting energy-neutral buildings and powering cooling and electronic systems during nighttime or low-light conditions. Complementing electricity generation, a transparent photothermal radiator of plasmonic  $\text{Fe}_3\text{O}_4@\text{Cu}_{2-x}\text{S}$  thin films efficiently converts UV and IR components of sunlight and indoor lighting into heat. Experiments in a Diffused Light Photothermal Box demonstrated temperature increases above 50 °C under simulated indoor conditions. These combined technologies create a multifunctional platform harvesting both electrical and thermal energy from natural and artificial light, enabling sustainable, self-powered building systems and efficient use of otherwise wasted photons in urban environments.



Organized by  
**UNITED** Scientific  
Group  
A non-profit organization

7<sup>th</sup> International Conference on  
**Materials Science and Engineering**

July 06-08, 2026 | Boston, MA | Hybrid

## **Session: Advanced Functional, Structural & Sustainable Materials**

### **Thermoplastics Composites Made by Non-Pressure Technologies**

Petr Špatenka<sup>1</sup>, Hana Šourková<sup>2</sup>, AhnjumolK.S.<sup>1</sup>, Jan Šřitr<sup>2</sup>

<sup>1</sup>*Department of Material Engineering, Faculty of Mechanical Engineering, Czech Technical University, Karlovo náměstí 13, 121 35, Praha 2, Czech Republic*

<sup>2</sup>*SurfaceTreat Inc., Náchodská 613, Platiště nad Labem, 503 01 Hradec Králové, Czech Republic*

#### **Abstract**

Adhesion between matrix and a filler is the key parameter to obtain proper mechanical properties of composites. Special sizings have been developed and frequently used thermoset matrix (epoxy, polystyren.etc) which enable production of composites with superior properties. Such composites are nowadays applied in various branches of industry including automotive and/or aircraft production. Improvement of interfacial adhesion in thermoplastic matrix based composites is still an open question. Grafting of polyolefin matrix with malehid anhydride is usually used to enhance the interfacial adhesion in thermoplastic composite. Plasma treatment is an ecological alternative. The industrial-scale device for plasma treatment of a powder material has been developed by the company SurfaceTreat Inc. Experimental results of thermoplastic composites made from thermoplastic polyethylene matrix and several types of reinforcement with natural fibers, glass fibres and/or carbon fibers will be presented. An application of the glass-fibre reinforced composite for industrial rotomolding production of insulating containers and a sports kayak will be demonstrated.

## **Session: Advanced Functional, Structural & Sustainable Materials**

### **Integrated Shielding: Combining Structure, Processability and Radiation Protection in a Single Fibre**

Robert Brüll\*, Pramod Ravichandran, Felix Schmidt, Severin Luhr

*FibreCoat GmbH, Germany*

#### **Abstract**

Lightweight radiation shielding remains a key challenge in spacecraft design, where conventional metallic enclosures and particle-filled systems impose penalties in mass, manufacturability and geometric flexibility. This work presents a fibre-integrated shielding concept based on continuous glass fibres coated with metals like bismuth, enabling radiation attenuation to be incorporated directly into textile and composite feedstocks rather than added as a secondary layer. Because bismuth is intrinsically brittle and not processable via conventional fibre routes, the approach relies on an inline coating technology that applies bismuth directly to continuous filaments while preserving textile processability. The resulting fibres can be integrated into composite architectures combining shielding capability, structural function and compatibility with established manufacturing processes. Shielding performance is evaluated using GEANT4 simulations based on representative lowEarth-orbit radiation spectra. Preliminary results indicate that the proposed composites can achieve approximately 25% performance increase or mass reduction respectively at comparable total ionising dose performance relative to aluminium in the studied configuration. This fibre-level integration enables drapable, tailorable shielding structures suitable for complex geometries and multifunctional applications. The work demonstrates a scalable pathway towards composite materials in which radiation protection, structural performance and manufacturing compatibility are co-designed at the filament level, providing a promising route for next-generation spacecraft structures and electronic protection concepts.



Organized by  
**UNITED** Scientific  
Group  
A non-profit organization

7<sup>th</sup> International Conference on  
**Materials Science and Engineering**

July 06-08, 2026 | Boston, MA | Hybrid

## **Session: Advanced Functional, Structural & Sustainable Materials**

### **Degradation Physics and Molecular Modeling for Nanomaterials**

Joe McPherson

*McPherson Reliability Consulting LLC, 2805 Shelton Way, Plano, TX 75093, USA*

#### **Abstract**

All fabricated materials are metastable and will degrade with time. This is a consequence of the material changing in an effort to reach a lower Gibbs Potential. Thus, for a material to be successful/reliable, the degradation rate must be fully comprehended. Toward this end, it is very important to understand when macroscopic models can no longer be used and a more microscopic approach (molecular approach) must be used for nanomaterials. During this presentation, we will use the example of dielectric thickness scaling in MOSFETS. In the semiconductor industry, gate dielectric thicknesses have decreased from ~ 50nm (1980s) to only a few nanometers today. In the process of scaling the SiO<sub>2</sub> gate dielectric thickness, microscopic (molecular) models were required to fully understand the changes in degradation physics: the dielectric breakdown strength improves with thickness reduction; high-k dielectrics have lower breakdown strength; only dielectrics with polar molecular-bonding experience time-dependent dielectric breakdown (TDDB); the TDDB life-time increases with frequency. It will be shown that molecular models must be used to fully explain the degradation physics for nanomaterials.



Organized by  
**UNITED** Scientific  
Group  
A non-profit organization

7<sup>th</sup> International Conference on  
**Materials Science and Engineering**

July 06-08, 2026 | Boston, MA | Hybrid

## Session: Advanced Functional, Structural & Sustainable Materials

### Valorization of Polyurethane Waste via Pyrolysis-Derived Carbon Black in Elastomeric PU Systems

Taha Alper Ünal<sup>1,3\*</sup>, Cem Yiğit<sup>2,3</sup>

<sup>1</sup>*Yıldız Technical University, Türkiye*

<sup>2</sup>*Kocaeli University, Türkiye*

<sup>3</sup>*Pimsa Automotive, Türkiye*

#### Abstract

Polyurethane (PU) waste represents a significant environmental challenge due to its high production volume and limited recycling options. This study investigates a material-oriented circular recycling strategy in which PU waste is converted into a functional pigment via thermochemical pyrolysis and reutilized in elastomeric polyurethane systems. The aim is to evaluate the compatibility of pyrolysis-derived recycled carbon black with conventional elastomeric PU formulations used in automotive applications.

PU waste was subjected to controlled pyrolysis to obtain a carbon-rich powder, which was processed into a black pigment. The pigment was incorporated at 4 wt% into an elastomeric PU formulation designed for automotive floor mat applications. For an accurate comparative assessment, both the standard and recycled pigment-modified elastomeric polyurethanes were synthesized using identical base chemistries, comprising polypropylene glycol (PPG), polyether polyol, and 4,4'-methylenediphenyl diisocyanate (MDI). The initial isocyanate index was set at 15% and subsequently optimized to 16% to achieve the targeted elastomeric stiffness and curing behavior.

Colorimetric properties were evaluated using spectrophotometric measurements based on L\*, a\*, and b\* coordinates. The recycled pigment-containing elastomeric PU exhibited color values closely matching those of the reference formulation. Mechanical durability was assessed via Taber abrasion testing in accordance with ASTM D4060 (H18 wheel, 1000 g load, 60 rpm, 1500 cycles). Both formulations demonstrated comparable abrasion resistance, with mass loss values of approximately 0.4%.

The results confirm that pyrolysis-derived recycled carbon black is chemically and mechanically compatible with elastomeric PU systems and can effectively replace conventional pigments. This approach provides a viable pathway for sustainable PU waste valorization within high-performance elastomeric applications.

## Session: Nano, Electronic & Functional Materials

### Crystal Field Theory as a Sufficient Framework for Magnetocrystalline Anisotropy Prediction in Spinel Ferrites

Vincent G. Harris<sup>1,2,3,4</sup>, Thi Thuy Pham<sup>1,2</sup>, Van Dao Nguyen<sup>1,2</sup>, Ogheneyunume Fitchorova<sup>1,2,4</sup>

<sup>1</sup>Center for Microwave Magnetic Materials and Integrated Circuits, Northeastern University, Boston, MA 02115, USA

<sup>2</sup>Department of Electrical and Computer Engineering, Northeastern University, Boston, MA 02115, USA

<sup>3</sup>Department of Chemical Engineering, Northeastern University, Boston, MA 02115, USA

<sup>4</sup>Kostas Research Institute at Northeastern University, Burlington, MA 01803, USA

#### Abstract

Quantitative design of spinel ferrites for targeted magnetocrystalline anisotropy ( $K_1$ ) requires a framework that is physically justified and practically tractable. This presentation establishes that crystal field theory (CFT), operating through the one-sublattice positive- $K_1$  energy (OSPE) formalism, is necessary and sufficient for that purpose, LFT and DFT occupy no intermediate role within the validated composition space.

The justification rests on the energy hierarchy  $\Delta_{CF}$  (1–2 eV)  $\gg$   $\lambda_{SO}$  (0.05–0.10 eV) for substitution of first-row transition-metal ions on regular spinel sites. This separation renders CFT the dominant perturbation, allows spin–orbit coupling as a secondary correction, and validates  $K_1$  as a linear superposition of single-ion contributions. The central design contrast is between  $Fe^{3+}$  ( $d^5$ ,  ${}^6A_1$ ,  $L = 0$ , negligible anisotropy) and  $Co^{2+}$  ( $d^7$ ,  ${}^4T_1$ , unquenched orbital moment,  $k_{Co} \approx +2.5 \times 10^5$  J/m<sup>3</sup>). Validation against five NiZnCo compositions yields agreement within  $\sim\pm 10\%$  using a single nephelauxetic scaling parameter. LFT adds no predictive improvement: covalency shifts  $\Delta_{CF}$  isotropically, charge-transfer states lie 3–5 eV above the ground state, and isotropic corrections cancel by symmetry in the  $K_1$  energy difference; the leading anisotropic LFT term enters only at third order in  $\lambda_{SO}/\Delta_{CF} \approx 0.05$ .

Validity boundaries are quantified: CFT linearity holds within  $\sim\pm 10\%$  for  $Co^{2+}$  loadings below  $\sim 8$  mol%; the Stevens operator formalism is required only when rare-earth dopants invert the energy hierarchy. These results provide the theoretical foundation for the Harris Six-Step Predictive Design Algorithm for  $K_1$ -targeted ferrite development.

## Session: Nano, Electronic & Functional Materials

### Twisted van der Waals Integration of Thin Magnetic Layers with Magnetic Skyrmion and Magnetic Tunneling Junctions for Next-Generation Memory

R. Obata<sup>1</sup>, H. Sun<sup>2</sup>, K. Samanta<sup>3</sup>, N. A. Shahed<sup>3</sup>, K. Watanabe<sup>4</sup>, T. Taniguchi<sup>4</sup>, K. Suenaga<sup>2</sup>, E. Saitoh<sup>5</sup>, K. Hirakawa<sup>6</sup>, K. D. Belashchenko<sup>3</sup>, E. Y. Tsybal<sup>3</sup>, J. Haruyama<sup>1,6</sup>

<sup>1</sup>Faculty of Science and Engineering, Aoyama Gakuin University, Kanagawa 252-5258, Japan

<sup>2</sup>The Institute of Scientific and Industrial Research, Osaka University, Osaka 567-0047, Japan

<sup>3</sup>Department of Physics and Astronomy & Nebraska Center for Materials and Nanoscience, University of Nebraska, Nebraska 68588, USA


<sup>4</sup>National Institute for Materials Science, Tsukuba 305-0044, Japan

<sup>5</sup>Department of Applied Physics, The University of Tokyo, Tokyo 113-8656, Japan

<sup>6</sup>Institute of Industrial Sciences, The University of Tokyo, Tokyo 153-8505, Japan

#### Abstract

Twistronics, a novel engineering approach involving the alignment of van der Waals (vdW) integrated two-dimensional materials at specific angles, has recently attracted significant attention<sup>[1]</sup>. Novel non-trivial phenomena have been demonstrated in twisted vdW junctions (*i.e.*, magic angle), such as unconventional superconductivity, topological phases and magnetism. However, there have been only few reports on integrated vdW layers with *large* twist angles  $\theta_t$ , such as twisted interfacial Josephson junctions using high-temperature superconductors<sup>[2]</sup>. Herein, we assemble vdW homo-junctions of the novel thin-magnetic flakes, Fe<sub>3</sub>GeTe<sub>2</sub> (FGT)<sup>[3]</sup>, with large  $\theta_t$  ranging from 0° to 90°, without inserting any tunnel barriers (Fig. 1)<sup>[4]</sup>. Nevertheless, we discover that these vdW homojunctions exhibit tunnel-magnetoresistance (TMR) like behavior (pseudo-TMR (PTMR) effect) with the ratios highly sensitive to the  $\theta_t$  values (Fig. 2). We reveal that the vdW gap at the junction interface between the twisted FGT layers can behave like a tunnel barrier and the  $\theta_t$  serves a control parameter for PTMR by drastically varying magnitudes of the lattice-mismatch and the subsequent appearance of antiferromagnetic (AFM) spin alignment. First-principles calculations considering vacuum gaps indicate strong dependence of TMR on the  $\theta_t$  driven by the 6-fold screw rotational symmetry of bulk FGT. While the PTMR ratios are still small, our previous theory predicts that the largely dissimilar AFM spin alignment and magnetic Skyrmions unique to the FGT (or FGaT) layers can lead to giant TMR effects (>> 1000 %) for the non-twisted FGT/vacuum gap/FGT TMR structure even at room temperature<sup>[5]</sup>. Further results, including these Skyrmion-based TMRs on WTe<sub>2</sub>/FGT or FGaT (Fig. 3), are presented at the conference<sup>[6]</sup>.

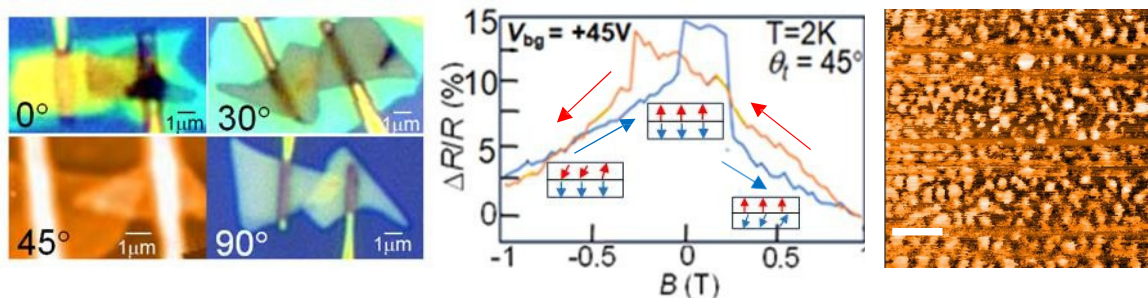

**Fig. 1** Twist-angle ( $\theta_t$ ) dependent images of vdW-integrated two FGT flakes.

**Fig. 2** PTMR peak (blue curve) observed at  $\theta_t$  of 45° in Fig. 1 under back gate voltages ( $V_{bg}$ ) of +45V. Schematic insets mean the lattice-mismatch derived AFM spin alignment of the two flakes.

**Fig. 3** MFM image of room-temperature magnetic Skyrmions in a  $Fe_3GaTe_2$  (FGaT) flake.

**References:**

- [1] Y. Cao, P. J. Herrero *et al.*, *Nature* **556**, 43 (2018).
- [2] S. Y. F. Zhao, P. Kim *et al.*, *Science* **382**, 1422 (2023).
- [3] R. Obata, J. Haruyama *et al.*, *Nanotechnology*. **35**, 475601 (2024).
- [4] R. Obata, J. Haruyama *et al.*, *Advanced Materials* **2411459** (2025).
- [5] X. Li, E. Y. Tsymbal *et al.*, *Nano Lett.* **19**, 5133 (2019).
- [6] K. Nohmi, J. Haruyama *et al.* Nature submitted,



Organized by  
**UNITED** Scientific  
Group  
A non-profit organization

7<sup>th</sup> International Conference on  
**Materials Science and Engineering**

July 06-08, 2026 | Boston, MA | Hybrid

## Session: Nano, Electronic & Functional Materials

### Chemical Stabilization of Niobium Interfaces for High-Coherence Superconducting Transmon Qubits

Ananya Chattaraj<sup>1\*</sup>, Conan Weiland<sup>2</sup>, Bruce Ravel<sup>2</sup>, Kim Kisslinger<sup>1</sup>, Steven L. Hulbert<sup>3</sup>, Aswin Kumar Anbalagan<sup>3</sup>, Andrew L. Walter<sup>3</sup>, Peter V. Sushko<sup>4</sup>, Mingzhao Liu<sup>1</sup>

<sup>1</sup>Center for Functional Nanomaterials, Brookhaven National Laboratory, Upton, NY 11973, USA

<sup>2</sup>Material Measurement Laboratory, National Institute of Standards and Technology, Gaithersburg, MD, 20899 USA

<sup>3</sup>National Synchrotron Light Source II, Brookhaven National Laboratory, Upton, NY 11973, USA

<sup>4</sup>Physical and Computational Sciences Directorate, Pacific Northwest National Laboratory, Richland, WA 99354, USA

#### Abstract

Dielectric loss arising from two-level systems (TLS) at surfaces and interfaces remains a major limitation to coherence in superconducting transmon qubits. Niobium (Nb), a widely used material in superconducting quantum circuits, readily forms native oxides under ambient conditions, leading to lossy dielectric interfaces that degrade device performance. Here, we demonstrate a robust and scalable fabrication strategy for chemically stabilizing Nb surfaces and mitigating further oxidation, including protection of both surface and sidewall regions relevant to superconducting transmon qubits. High-purity Nb films were fabricated with bulk-like superconducting transition temperatures ( $T_c = 9.30 \pm 0.10$  K). We show that a thin Pt encapsulation layer, deposited after native oxide formation, can be transformed by thermal annealing into a Nb–Pt alloy at the surface. Spectroscopic and microscopic analyses confirm the formation of a chemically stable metallic alloy layer and its ability to suppress further oxide growth. Ab initio simulations reveal the atomic-scale rearrangement and electronic-structure evolution associated with Pt incorporation into native niobium oxide, providing insight into the stabilization mechanism. This approach offers a materials pathway for engineering chemically robust Nb interfaces, including sidewalls, toward higher-coherence superconducting transmon qubit architectures.

## Session: Nano, Electronic & Functional Materials

### Enhancing Sustainable Photocatalytic CO<sub>2</sub> Conversion to Methane via Molecularly Doped Graphitic Carbon Nitride Nanostructured Materials

Rengaraj Selvaraj\*, Rudra P. Singh

*Department of Chemistry, College of Science, Sultan Qaboos University, Muscat, PC-123, Sultanate of Oman*

#### Abstract

The development of efficient photocatalysts for solar energy driven CO<sub>2</sub> conversion has attracted significant attention as a sustainable strategy to address global energy and environmental challenges. Developing graphitic carbon nitride (g-C<sub>3</sub>N<sub>4</sub>) based materials have emerged as promising photocatalysts due to their suitable band position, chemical stability and visible light responsiveness. In this research work, our research group developed engineered sulfur and DAP doped C<sub>3</sub>N<sub>4</sub> materials for efficient CO<sub>2</sub> reduction under visible light irradiation. The synthesized materials were systematically characterized using advanced analytical techniques including XRD, XPS, SEM, TEM, EDX, photoluminescence spectroscopy, and electrochemical studies to investigate their structural, morphological, and electronic properties. The photocatalytic CO<sub>2</sub> reduction performance of BCN, sulfur doped carbon nitride (SCN) and DAP modified SCN photocatalysts was systematically investigated and evaluated based on CO<sub>2</sub> conversion rates (μmol g<sup>-1</sup>). Pristine BCN exhibited a relatively low CO<sub>2</sub> reduction activity of 0.02702 μmol g<sup>-1</sup> due to its limited visible-light absorption and rapid recombination of photogenerated charge carriers. Sulfur incorporation significantly enhanced the photocatalytic performance, with SCN achieving a CO<sub>2</sub> conversion rate of 0.09299 μmol g<sup>-1</sup>, indicating improved charge transport and broadened visible-light harvesting capability. Among all synthesized materials, 7DSCN showed the highest CO<sub>2</sub> reduction activity of 0.13686 μmol g<sup>-1</sup>. The superior performance of 7DSCN is attributed to the formation of an efficient donor-π-acceptor (D-π-A) electronic structure, which promotes rapid charge transfer, suppresses electron-hole recombination, prolongs charge carrier lifetime, and enhances CO<sub>2</sub> adsorption and activation, leading to efficient solar-driven methane generation.

## Session: Nano, Electronic & Functional Materials

### Vapor-Deposited Nanocoatings for Rapid and Anti-Fouling Membrane Distillation

Mengfan Zhu

*Division of Natural Sciences, Lyon College, USA*

#### Abstract

Membrane distillation (MD) is a thermally driven separation technology with strong potential to utilize low-grade or waste heat, produce high-purity freshwater, and treat high-salinity feeds. However, its practical deployment is limited by low permeate flux, pore wetting, and membrane fouling, which compromise efficiency and long-term stability. This presentation introduces a vapor-deposited nanocoating platform that enhances mass transport and fouling resistance by precisely engineering membrane interfaces without compromising pore structure.

Using a solvent-free technique called initiated chemical vapor deposition (iCVD), ultrathin hydrophobic, hydrophilic, and omniphobic nanocoatings were conformally deposited onto porous substrates. The solvent-free coating process allows precise surface modification while preserving membrane microstructure. As a result, large-pore-size membranes (up to 2.0  $\mu\text{m}$ ) can be stably employed in MD, enabling stable MD operation with >99.99% salt rejection and 48–73% higher permeate flux compared to smaller-pore counterparts. Furthermore, integration of hydrophilic and omniphobic layers creates Janus architectures that resist emulsion wetting and organic fouling. Under highly saline and oil-containing conditions, the modified membranes maintained stable flux and excellent desalination performance, demonstrating strong resistance to oil-induced wetting and foulant adhesion. By decoupling surface chemistry from bulk morphology, vapor-deposited nanocoatings provide a scalable strategy to overcome the flux–stability trade-off in MD and advance the design of next-generation MD membranes.

## Session: Materials Design, Modeling & Characterization

### Strain Localization in Austenitic Stainless Steels by Atom Force Microscope

Ghiath Monnet<sup>1\*</sup>, Charlie Kahloun<sup>2</sup>

<sup>1</sup>EDF R&D – MMC, EDF Lab les Renardières, 77250 MORET sur LOING, France

<sup>2</sup>Université Sorbonne Paris Nord, 93430 Villetaneuse, France

#### Abstract

Topographic analysis of SBs in austenitic stainless steels, deformed in situ under tension up to 0.03 plastic strain, reveals that SBs nucleate first in the grain bulk. A SB can accommodate 6 to 133 times the macroscopic deformation. The number of detected SBs saturates very early at 1% plastic strain, which coincides with the peak of kinematic hardening in this material. Beyond this point, plasticity is primarily accommodated through elongation of SBs. The accommodated shear and SB thickness vary between grains but remain nearly constant during the tensile test. With increasing deformation, SBs impinge on grain boundaries, leading to strong interactions that follow different scenarios identified through AFM measurements. In parallel, an original theoretical framework is developed to interpret SB topography in relation to local shear and dislocation mechanisms. It is shown that the number of emerging dislocations per SB is constant, independent of grain orientation or neighborhood. This suggests that dislocation sources within a single SB emit an approximately constant number of dislocation loops before extension. Additionally, the quasi-static elongation of SBs adheres to a kinematic condition under which the Geometrically Necessary Dislocation (GND) density at the SB ends remains constant during elongation. Detailed analysis of SB topography in intergranular regions sheds light on the mechanisms governing SB interactions with grain boundaries. Slip transmission is found to require large GND storage against grain boundaries before transmission. The other types of interactions are analyzed too, revealing some surprising features of dislocation interaction with grain boundaries.

## Session: Materials Design, Modeling & Characterization

### A Two-Scale Crystal Plasticity and AI Surrogate Framework for Predicting Early Fatigue Damage in Additively Manufactured Materials

Jiahao Cheng\*

*Renewable Energy Research Center, Huairou National Laboratory, Beijing, China*

#### Abstract

Predicting fatigue crack initiation from manufacturing-induced microstructural features is a central challenge in computational materials science. This challenge is especially pronounced in additively manufactured (AM) alloys, where process-induced heterogeneity in microstructure and surface condition can strongly affect fatigue resistance. In this work, a two-scale crystal plasticity finite element (CPFE) framework coupled with a Chaboche-type fatigue damage model is developed to simulate microcrack initiation and early-stage fatigue damage under low-cycle fatigue (LCF) loading in laser-powder bed fusion (L-PBF) Nickel-based alloys. To quantify the role of AM-induced features, synthetic microstructures and surface conditions spanning a broad range of process-relevant characteristics are constructed for large-scale simulations. The resulting CPFE-based fatigue life data are statistically analyzed, and an AI-based surrogate model is developed to rapidly predict fatigue crack initiation and early propagation from key microstructural and surface descriptors. This framework combines physics-based simulations with data-driven modeling to enable rapid prediction of fatigue life while providing mechanistic insight into how AM process-induced microstructural features influence fatigue crack formation and early propagation.

## **Session: Materials Design, Modeling & Characterization**

### **Accelerated Development of Materials Using High-Throughput Strategies and AI/ML**

Surya R. Kalidindi

*Georgia Institute of Technology, USA*

#### **Abstract**

The dramatic acceleration of the materials innovation cycles is contingent on the development and implementation of high throughput strategies in both experimentation and physics-based simulations, and their seamless integration using the emergent AI/ML (artificial intelligence/machine learning) toolsets. This talk presents recent advances made in the presenter's research group, including: (i) a novel information gain-driven Bayesian ML framework that identifies the next best step in materials innovation (i.e., the next experiment and/or physics-based simulation to be performed) that maximizes the expected information gain towards a specified target (e.g., optimized combination of material properties, refinement of a material constitutive response), (ii) computationally efficient versatile material structure analyses and statistical quantification tools, (iii) formulation of reduced-order process-structure-property models that enable comprehensive inverse solutions needed in materials design (e.g., identifying specific compositions and/or process histories that will produce a desired combination of material properties), and (iv) high throughput experimental protocols for multi-resolution (spatial resolutions in the range of 50 nm to 500 microns) mechanical characterization of heterogeneous materials in small volumes (e.g., individual constituents in composite material samples, thin coatings or layers in a multilayered sample). These recent advances will be illustrated with case studies.

## Session: Materials Design, Modeling & Characterization

### AI-Guided Predictive Modeling of Lanthanide Separation Using Ligands in Capillary Electrophoresis

Karen D'Souza\*, Chloe Tolbert, Vaibhav Yadav

*Idaho National Laboratory, USA*

#### Abstract

The separation of lanthanides is essential for critical metal supply chains. However, the separation challenge remains a bottleneck due to subtle chemical differences across the lanthanide series. These challenges motivate the development of predictive, data-driven modeling approaches. In this work, we present a layered, data-driven framework to predict and interpret lanthanide separation behavior in capillary electrophoresis by integrating empirical modeling, physics-informed features, and chemistry-aware descriptors.

We first establish a baseline predictive model using ligand identity, concentration, and metal pair, achieving moderate accuracy ( $R^2 \approx 0.74$ ). To incorporate domain knowledge, we introduce physics-informed features derived from electrophoretic mobility and peak width, leading to a substantial improvement in predictive performance ( $R^2 \approx 0.94$ ). These results indicate that separation resolution is strongly governed by underlying transport processes. Next, we develop a machine learning model using ligand descriptors, including pKa, denticity, stability constants and chemical descriptors. This approach achieves high predictive accuracy for mid- and heavy-series lanthanides ( $R^2 > 0.87$ ), while revealing limitations for light lanthanide pairs. Feature importance analysis further uncovers a mechanistic transition across the series, with separation behavior shifting from mobility-dominated to thermodynamically controlled regimes. This framework enables AI-guided exploration of ligand selection and separation conditions, supporting rapid optimization of separation performance and reducing experimental burden in critical metal processing.



Organized by  
**UNITED** Scientific  
Group  
A non-profit organization

7<sup>th</sup> International Conference on  
**Materials Science and Engineering**

July 06-08, 2026 | Boston, MA | Hybrid

## Session: Materials Design, Modeling & Characterization

### Contrastive Diffusion Models Enable Targeted Discovery of Lung-Specific Cell-Penetrating Peptides

Anurag Upadhyaya\*, Srirupa Chakraborty

*Department of Chemical Engineering, Northeastern University, Boston, MA, USA 02115*

#### Abstract

Cell-penetrating peptides (CPPs) are important carriers for delivering therapeutic molecules into cells. However, identifying functional and application-specific CPPs remains challenging. In this study, we develop a deep learning framework to classify CPP and nonCPP sequences. The model combines gated recurrent units (GRU), transformer-based attention, and attention pooling. This design helps capture both local sequence patterns and long-range dependencies. Our model learns compact and informative representations of peptide sequences. These representations are then used to organize the peptide feature space. This allows us to explore new peptide candidates with desired functional properties. The approach enables guided discovery without relying only on known templates. From a material and drug delivery perspective, this framework supports the design of efficient peptide carriers. It helps in selecting CPPs for packaging and delivering therapeutic cargo such as siRNA, mRNA, and proteins. Our model reduces experimental effort and improves formulation design. Overall, this work shows how sequence-based learning can accelerate CPP discovery. It also supports better material selection for targeted drug delivery and packaging applications.



Organized by  
**UNITED** Scientific  
A non-profit organization | Group

7<sup>th</sup> International Conference on  
**Materials Science and Engineering**

July 06-08, 2026 | Boston, MA | Hybrid

## Session: Materials Design, Modeling & Characterization

### **GLYCOGRAPHER: Atomistic Binding Landscape Characterization Towards Targeted Glycan Nanocarrier Design**

Jason Kantorow<sup>1\*</sup>, Shashi Murthy<sup>3</sup>, Srirupa Chakraborty<sup>1,2</sup>

<sup>1</sup>Department of Chemical Engineering, Northeastern University, Boston, MA 02115, USA

<sup>2</sup>Department of Chemistry and Chemical Biology, Northeastern University, Boston, MA 02115, USA

<sup>3</sup>NaniteBio, Boston, MA 02210, USA

#### **Abstract**

The antibody-like targeting capabilities and unrivaled biocompatibility of glycans have made them a highly sought after material for use in drug delivery systems (DDSs) since the late 2000s; additionally, the past two decades have proven that simulation of glycosylated systems can overcome the barriers inherent to experimental glycobiology which often cannot provide atomistic resolution models for design. While computational simulation and design of glycosylated DDSs have seen some advancements in recent years, a comprehensive methodology capable of accommodating the extensive design space and multivalent binding phenomena inherent to targeted glycomaterials has not yet been fully established. It is here that we propose a computational platform equipped to generate energy-optimized, targeted de novo glycoligands via a novel PyRosetta-based protocol towards their actualization as a smart biomaterial for use in nanomedicine. This end-to-end simulation pipeline employs dynamic grid box-sampled docking of glycan fragment probes to characterize per-fragment interaction energy landscapes across the putative binding site of a known receptor. Superimposed landscapes are then used to design candidate sequences using fragment-linking and “anchor-and-grow” approaches. All computational processes including their dependencies are open-source and constructed entirely in Python, leaving open the prospect for easily accessible deployment through package managers like Anaconda. This methodology promises to extend the application of glycan sequence optimization and atomistic modeling to biopharmaceutical materials development.

## Session: Materials Design, Modeling & Characterization

### Toward Glycoprotein-Inspired Biomaterials: Improved Implicit Solvent Modeling of Glycans

Simran Pandey<sup>1</sup>, Srirupa Chakraborty<sup>1,2</sup>

<sup>1</sup>*Departments of Chemical Engineering, Northeastern University, Boston, MA 02115, USA*

<sup>2</sup>*Departments of Chemistry & Chemical Biology, Northeastern University, Boston, MA 02115, USA*

#### Abstract

Nature offers a range of soft materials, including lubricating mucus hydrogels, polysaccharide-rich algal gels, and marine adhesive protein coatings. These materials excel in barrier, lubrication, and adhesion because they are built from densely hydrated glycan-protein networks. Such glycoproteins form dynamic, water-rich assemblies with significant biomedical potential, especially for developing new biopolymers.

While such glycoprotein-rich materials are highly promising, their atomistic behavior remains difficult to characterize, despite intensive experimental and computational efforts. Explicit solvent simulations of these highly hydrated environments require immense computational resources, particularly because glycoproteins are large and heavily glycosylated. In this study, we improve implicit solvent which treats water as a continuum medium, as a pathway toward efficient, molecular-level understanding of glycan-driven material properties, making large-scale simulations more tractable.

We modeled five glycans commonly found in the mucin glycoproteins, a protein known to be 50–80% glycosylated, and interacting with water to form hydrogels with several important physiological roles in health and disease. To compare water models, all simulations are performed using NAMD, with both an implicit (Generalized born) and an explicit (TIP3) solvent model. We evaluated and optimized conformational properties such as flexibility profiles, dihedral distributions, puckering transitions, persistence length, and aggregation tendencies, all under different glycan densities and charge states.

Improved implicit solvent model studies of glycan hydration further the computational design of bioinspired materials. This progress allows for the development of tunable hydrogels, self-healing coatings, and protective bio barriers that accurately emulate the structural and functional features of natural glycoprotein networks.



Organized by  
**UNITED** Scientific  
Group  
A non-profit organization

7<sup>th</sup> International Conference on  
**Materials Science and Engineering**

July 06-08, 2026 | Boston, MA | Hybrid

## Session: Materials for Health, Bioengineering & Society

### 3D Printing of Alginate Scaffolds Crosslinked with Chitin, Chitosan, and the Chitin-Glucan Complex Using Ethanol Solvent Exchange

Venkatesh Balan<sup>1\*</sup>, Muhammad Ayser<sup>1</sup>, Micholas Dean Smith<sup>2</sup>, Justin Smith<sup>3</sup>, Wafa Tonny<sup>3</sup>, Farzana Likhi<sup>3</sup>, Alamgir Karim<sup>3</sup>, Abishek Kafle<sup>4</sup>, Weihang Zhu<sup>4</sup>, Megan Robertson<sup>5</sup>

<sup>1</sup>Department of Engineering Technology, Biotechnology Program, Cullen College of Engineering, University of Houston, TX 77479, USA

<sup>2</sup>UT/ORNL Center for Molecular Biophysics & Dept. of Biochemistry and Cellular and Molecular Biology, University of Tennessee, Knoxville, TN 37996, USA

<sup>3</sup>Materials Science and Engineering, Cullen College of Engineering, University of Houston, Houston, TX 77024, USA

<sup>4</sup>Department of Engineering Technology, Mechanical Engineering Technology Program, Cullen College of Engineering, University of Houston, TX 77479, USA

<sup>5</sup>Department of Chemical and Biomolecular Engineering, Cullen College of Engineering, University of Houston, Houston, TX 77024, USA

#### Abstract

This study investigates nontoxic, rapid crosslinking strategies for extrusion 3D printing of sodium alginate scaffolds reinforced with mushroom-derived chitin–glucan complexes (CGCs). By combining alginate’s shear-thinning, printable rheology with CGCs’ higher flexibility and bioactivity versus crustacean chitin, composite inks aim to overcome alginate’s weak mechanics and poor cell adhesion. We implement a solvent-exchange deposition modeling (SEDM) approach: the extruded filament encounters a locally controlled exchange medium that simultaneously removes a benign solvent and delivers crosslinking ions (e.g., Ca<sup>2+</sup> in aqueous microenvironments or buffered polymeric crosslinkers). This rapid, spatially confined gelation minimizes filament spreading, preserves high-resolution geometry, and enables stacked architectures with improved interlayer bonding. CGCs are dispersed or partially deacetylated to enhance intermolecular interactions with alginate, promoting hydrogen bonding and entanglement that raise stiffness and toughness without cytotoxic reagents. Outcome metrics include print fidelity, compressive and tensile modulus, viscoelastic recovery, porosity, and in vitro cell attachment/proliferation (MSC and endothelial models). Anticipated benefits are mechanically robust, bio interactive scaffolds suitable for soft-tissue engineering and wound dressings, produced via a scalable, nonhazardous process. The work provides a pathway to translate mushroom-based polysaccharide reinforcements into clinically relevant, rapidly fabricated hydrogel constructs.



Organized by  
**UNITED** Scientific  
Group  
A non-profit organization

7<sup>th</sup> International Conference on  
**Materials Science and Engineering**

July 06-08, 2026 | Boston, MA | Hybrid

## Session: Materials for Health, Bioengineering & Society

### New Functionalized Scaffold Sensor for Advanced Stage Cancer Monitoring

Danling Wang<sup>1\*</sup>, Farnia Ghafouri Sabzevari<sup>2</sup>, Kalpana Katti<sup>3</sup>

<sup>1</sup>Department of Electrical and Computer Engineering, North Dakota State University, Fargo, ND, USA

<sup>2</sup>Department of Cellular and Molecular Biology, North Dakota State University, Fargo, ND, USA

<sup>3</sup>Department of Civil, Construction, and Environmental Engineering, North Dakota State University, Fargo, ND, USA

#### Abstract

Pancreatic cancer is increasingly prevalent, characterized by a high mortality rate. Due to the current limitations of diagnostic methods, the ability to detect this cancer in its early stages remains elusive, resulting in persistently low survival rates for individuals with pancreatic cancer. Nanomaterials are now getting more attention in the field of cancer research. Due to the unique properties, including high electrical conductivity, hydrophilicity, excellent thermal stability, large interlayer spacing, easily tunable structure, and high surface area, MXenes, a new and intriguing family of 2-dimensional transition metal carbides, nitrides, and carbonitrides, have attracted a lot of interest in the field of nanomaterials. These nanomaterials are good at finding trace amounts of different analytes. Additionally, because of their tunable qualities, we can alter their structure and consequently shape their properties to meet the needs of sensing response. The smectite groups of natural clay minerals including montmorillonite nanoclay (MMT), have the capacity to promote bone development and cell behavior. In order to identify pancreatic cancer early, Ti<sub>3</sub>C<sub>2</sub> MXene and their composites made with montmorillonite nanoclay (MMT) are showing promise in application of sensing response. By observing the distinctive pattern in resistance change of these sensors, we can not only track their reaction but also tell cancerous samples apart from non-cancerous samples. Additionally, MXene's excellent selectivity aids in the 'identification' of particular targeted analytes from a variety of different chemical and biological analytes, making them more trustworthy. The MXene-MMT composites-based scaffold sensor is anticipated to soon be able to both diagnose cancer and aid in tissue regeneration.



Organized by  
**UNITED** Scientific  
A non-profit organization Group

7<sup>th</sup> International Conference on  
**Materials Science and Engineering**

July 06-08, 2026 | Boston, MA | Hybrid

## Session: Materials for Health, Bioengineering & Society

### Simulating Glycan Barriers to Accelerate Therapeutic Delivery and Design

Srirupa Chakraborty<sup>1,2,3</sup>

<sup>1</sup>Department of Chemical Engineering, Northeastern University, Boston, USA

<sup>2</sup>Department of Chemistry and Chemical Biology, Northeastern University, Boston, USA

<sup>3</sup>Department of Physics, Northeastern University, Boston, USA

#### Abstract

Effective therapeutic delivery requires navigating some of biology's most formidable molecular barriers - many of which are decorated or structured by glycans. My group develops computational and data-driven methods to understand and design around these glycan-mediated challenges, spanning from viral immunology to therapeutic packaging and mucosal biology. At the viral interface, we have built a suite of modeling tools to characterize the dense glycan shields of pathogens such as HIV and SARS-CoV-2. These simulations quantify how glycans mask protein surfaces and identify vulnerable sites that antibodies can exploit, offering guidance for immunogen design. Building on this, we integrate machine learning with molecular modelling to predict antibody-antigen binding interfaces, advancing both antibody engineering and our broader ability to design therapeutics that can selectively target glycosylated proteins. Beyond immunology, we apply these principles to therapeutic delivery. In collaboration with industry partners, we design glycopeptide-based polymers as bespoke packaging for nucleic acid therapies. By leveraging glycans and peptide motifs, these vehicles are engineered to penetrate mucus barriers, protect payloads, and enhance uptake efficiency. Complementing this, we use atomistic simulations of mucins, the heavily glycosylated polymers that form mucus hydrogels, to model drug-mucus interactions and understand how these networks regulate transport. Together, these efforts highlight how computation and data science can transform glycans from obstacles into design elements, enabling more effective strategies for drug delivery, gene therapy, and biomaterial innovation.

## **Session: Materials for Health, Bioengineering & Society**

### **Novel Platinum Nanotherapeutics Induce ROS Storm to Combat Chemoresistant Cancers**

Yongbin Liu\*, Junhua Mai

*Department of Nanomedicine, Houston Methodist Academic Institute, Houston, TX, 77030, USA*

#### **Abstract**

Chemoresistance remains a critical challenge in effective cancer therapy. While reactive oxygen species (ROS) generation has emerged as a promising therapeutic strategy, current ROS-inducing agents often fail to achieve sufficient oxidative stress to eliminate resistant tumor cells. Here, we present carrier-platin, a novel platinum (Pt)-based nanotherapeutic engineered by uniformly confining ultras-small Pt nanoparticles within a poly(amino acids) carrier. Carrier-platin rapidly induces a robust and sustained ROS burst in cancer cells, triggering cell death within just 30 minutes of treatment. Distinct from traditional Pt drugs like cisplatin that rely on DNA intercalation and apoptosis, carrier-platin operates through a noncanonical mechanism independent of DNA damage. This unique mechanism of action effectively bypasses key resistance pathways commonly upregulated in multidrug-resistant tumors. Carrier-platin exhibits broad-spectrum anti-tumor activity in multiple in vitro and in vivo murine cancer models—including those with established therapeutic resistance—while maintaining a favorable systemic toxicity profile. Our findings highlight a fundamentally new therapeutic mechanism of Pt-driven ROS catalysis that is highly effective against chemoresistant cancer cells. By disrupting redox homeostasis beyond DNA repair, carrier-platin redefines the therapeutic potential of Pt-based agents and opens a new avenue for combating drug resistance in cancers.

## **Session: Materials for Health, Bioengineering & Society**

### **A Molecular Blueprint for Mucin-Inspired Biomaterial**

Joshua Kojo Aduampong Mantey\*, Simran Pandey, Srirupa Chakraborty

*Northeastern University, Boston, USA*

#### **Abstract**

Mucin inspired biomaterials represent a rapidly growing class of functional polymers engineered to replicate the selective permeability, lubrication, and molecular recognition properties of biological mucus. MUC2, the dominant mucin of the intestinal barrier, is an extreme case of this complexity exceeding 5,000 amino acids in length, with O-glycans comprising 40–80% of its total mass. This makes MUC2 extraordinarily difficult to study. Experimentally, its size and glycan heterogeneity confound structural characterization. We have built a scaled atomistic model of MUC2 that preserves its glycosylation patterns, domain architecture, and key physical properties. Using all-atom molecular dynamics simulations, we characterize its polymer behavior across three glycosylation states: unglycosylated, moderately glycosylated, and extensively glycosylated. We have determined the optimal model length and scale, and characterized chain extension, structural behavior, and interaction energetics as a function of glycan load. Glycosylation progressively expands the polymer chain through steric and electrostatic repulsion between O-glycan arrays. We further probe how this glycosylation dependent conformation controls the accessibility of sodium taurocholate, a major intestinal bile salt, along the polymer backbone. These results of chain extension and binding energetics provide a direct molecular basis for designing mucin inspired materials. Glycan density emerges as the primary lever over chain architecture and partitioning behavior. This work offers a principled, atomistically grounded framework for engineering glycopolymers for mucosal drug delivery, bioprotective coatings, and hydrogel scaffolds.



Organized by  
**UNITED** Scientific  
Group  
A non-profit organization

7<sup>th</sup> International Conference on  
**Materials Science and Engineering**

July 06-08, 2026 | Boston, MA | Hybrid

## Session: Functional, Sustainable & Next-Generation Materials

### Metal Powder Preparation Using Gas Atomization Technology

Qingchun Yu<sup>1,2</sup>, Weijin Yu<sup>1,2</sup>, Chong Huang<sup>1,2</sup>, Wenlong Jiang<sup>1,2</sup>

*<sup>1</sup>National Engineering Research Center of Vacuum Metallurgy, Kunming University of Science and Technology, Kunming, China*

*<sup>2</sup>Faculty of Metallurgical and Energy Engineering, Kunming University of Science and Technology, Kunming, China*

#### Abstract

Gas atomization technology is one of the most essential technologies for preparing metal powders. With this process, the liquid metal flowing from the melt delivery tube is atomized through a high-velocity gas sprayed from a nozzle with an angled. In our work, the variation of the position of the melt delivery tube on the pressure at the tip of the delivery tube was investigated, and the effect of mass median diameter, particle size distribution, and yield was experimentally studied and analyzed. Clogging of the delivery tube was discussed. Experimental studies showed that the yield gradually increased at critical and prominence positions at low pressure and decreased at sag positions, providing significantly lower yields. At higher pressure, yields at critical and prominence positions gradually reduced, with prominence positions at 3 MPa producing powders with smaller average particle sizes and higher yields. With the increase in the length of the delivery tube, the flow resistance increased. Shortening the length of the tube reduces the flow resistance and increases the superheat of the melt.



Organized by  
**UNITED** Scientific  
Group  
A non-profit organization

7<sup>th</sup> International Conference on  
**Materials Science and Engineering**

July 06-08, 2026 | Boston, MA | Hybrid

## Session: Functional, Sustainable & Next-Generation Materials

### Synthesis of $\text{Fe}_x\text{O}_y$ /Activated Biochar Composite from Patchouli Biomass and Characterization of its Potency as Adsorbent of Organic Pollutant

Tutik Setianingsih<sup>1\*</sup>, Ewies Fawzy Ewies<sup>2</sup>

<sup>1</sup>Department of Chemistry, Brawijaya University, Indonesia

<sup>2</sup>Organometallic and Organometalloid Chemistry Department, National Research Center, Egypt

#### Abstract

Biochar is a porous material which can be produced by biomass waste pyrolysis and modified using metal oxide to improve its adsorption performance. Activated biochar (AB) was synthesized from patchouli biomass waste to study the effect of calcination temperature on its potency as a drug pollutant adsorbent. Research processes included the biomass pyrolysis with  $\text{CoCl}_2$  activator, AB impregnation with  $\text{FeCl}_3$ ,  $\text{FeCl}_3/\text{AB}$  calcination at various temperatures, product characterizations (X-ray diffraction, FTIR spectrometry), and paracetamol adsorption test at various concentrations. The paracetamol concentrations were analyzed using UV-Vis spectrophotometry. The adsorption data was treated using Langmuir, Freundlich, and Dubinin-Radushkevich (DR) models. The diffractograms indicated the  $\alpha\text{-Fe}_2\text{O}_3$ ,  $\gamma\text{-Fe}_2\text{O}_3$ ,  $\text{FeFe}_2\text{O}_4$ , and carbon turbostratic structures. The  $\text{Fe}_x\text{O}_y$  crystallinity increased by increasing temperature. The FTIR spectra significantly indicated the functional group changing at 600 °C. In the adsorption test, the  $\text{Fe}_x\text{O}_y/\text{AB-800}$  composite gave the highest adsorption capacity of 53.087 mg/g (Langmuir) with a correlation coefficient of 0.964 (very high correlation), and the physical adsorption mechanism based on adsorption energy of 530.330 J/mol (DR) and  $1/n$  value of 0.62 (Freundlich) provided the favorable adsorption based on both the RL of 0.457 (Langmuir) and the n constant of 1.579 (Freundlich). Thus, the  $\text{Fe}_x\text{O}_y/\text{AB-800}$  composite has potential as an adsorbent of organic pollutants such as paracetamol.



Organized by  
**UNITED** Scientific  
Group  
A non-profit organization

7<sup>th</sup> International Conference on  
**Materials Science and Engineering**

July 06-08, 2026 | Boston, MA | Hybrid

## Session: Functional, Sustainable & Next-Generation Materials

### Enhanced Power Conversion Efficiency and Stability of $\text{Cu}_2\text{ZnSnS}_4$ Quantum Dot Based Photovoltaic Device by Incorporating Carbon Nanostructures in the Active Layer

Pitamber Mahanandia

*Physics & Astronomy, National Institute of Technology Rourkela-769008, Odisha, India*

#### Abstract

A green and low temperature solvothermal have been adopted to prepare  $\text{Cu}_2\text{ZnSnS}_4$  (CZTS) quantum dots (QDs). The CZTS was used as light absorbing material in the photovoltaic device structure SLG/Mo/CZTS QDs(light absorbing layer)/CdS/ZnO/Al to investigated its performance. Photovoltaic parameters obtained from the measurement are open circuit voltage ( $V_{oc}$ ) of 0.67V, short circuit current density ( $J_{sc}$ ) of 15.8mA/cm<sup>2</sup>, a fill factor (FF) of 56.2% and a power conversion efficiency(PCE) of 5.94% for active area of  $0.5 \pm 0.1$  cm<sup>2</sup>. CZTS quantum dots have lower mobility. If a material of higher mobility is added in CZTS, the performance of the photovoltaic device could be enhanced. In this regard, various allotropes of carbon has been incorporated in CZTS and investigated its photovoltaic performances. In case of reduced grapheme oxide (rGO) incorporated CZTS QDs, the  $J_{sc}$  has been improved from 15.8mA/cm<sup>2</sup> to 16.4mA/cm<sup>2</sup>,  $V_{oc}$  of 0.67V and FF of 56.7%. The PCE obtained for CZTS QDs-rGO hybrid device was 6.25%. The  $J_{sc}$  has been noticed to be improved even up-to 17.7mA/cm<sup>2</sup> by adding conducting MWCNTs to CZTS QDs. The CZTS QDs-MWCNTs hybrid device performance found to be enhanced with 6.77% PCE,  $V_{oc}$  of 0.67V and FF of 56.9%. In case of few layer graphene sheets(FLGS) incorporated CZTS QDs, the  $J_{sc}$  has been improved from 15.6 mA/cm<sup>2</sup> to 19.07 mA/cm<sup>2</sup>,  $V_{oc}$  of 0.695V, FF of 57.7% and PCE of 7.64%. Improvement in performance of the CZTS based photovoltaic devices by incorporation of carbon nanostructures are attributed to the high electron/hole mobility, efficient light absorption, large exciton lifetime because of effective charge separation from QDs to carbon nanostructures, and fast charge transfer to current collector



Organized by  
**UNITED** Scientific  
Group  
A non-profit organization

7<sup>th</sup> International Conference on  
**Materials Science and Engineering**

July 06-08, 2026 | Boston, MA | Hybrid

## Session: Functional, Sustainable & Next-Generation Materials

### Dual Emissive Carbon Dots for Sensing Applications

Xiangcheng Sun

*Department of Chemical Engineering, Rochester Institute of Technology, Rochester, NY, 14623, USA*

#### Abstract

Carbon dots have become increasingly popular in the past decade due to their unique optical properties, good biocompatibility, low toxicity, great aqueous stability, and facile synthesis. Our goal is to design and to develop fluorescent carbon dots (CDs) with multiple emissions for sensing applications with improved sensitivity, selectivity and reliability. Two types of carbon dots will be presented for chemo-sensing applications. 1) Dual emissive carbon dots (CDs) through a simple solvothermal method were obtained. The CDs showed excitation-dependent emission properties with both blue and green emissions as well as solvatochromic properties. Besides, the CDs' emissions could be affected by water in different organic solvents, which have been developed as efficient sensors for the detection of trace amounts of water. By taking advantage of the dual emissions, the ratiometric detection of water has been achieved. 2) Carbon dots with multi emissions and chelating agents (dithizone) were developed to efficient detection of lead ions. Lead ions recovered fluorescence of CDs/dithizone complex solution efficiently. The enhancement of fluorescence could be developed for Pb<sup>2+</sup> detection sensitively and selectively. In addition, by taking advantage of advanced data analysis such as principal components analysis (PCA), several metals could be differentiated utilizing changes of dual emissions.



Organized by  
**UNITED** Scientific  
Group  
A non-profit organization

7<sup>th</sup> International Conference on  
**Materials Science and Engineering**

July 06-08, 2026 | Boston, MA | Hybrid

## Session: Functional, Sustainable & Next-Generation Materials

### Rare-Earth-Doped Nanostructured Phosphors in Recycled Glass Hosts: Sustainable Phosphor-in-Glass Composites

Josefina Alvarado Rivera

*Secihti - Cinvestav Unidad Querétaro, Mexico*

#### Abstract

Phosphor-in-glass (PiG) composites are increasingly explored in LED applications due to their enhanced durability and thermal resistance compared to traditional phosphors embedded in polymeric resins, particularly under demanding operating conditions. A sustainable alternative involves embedding rare-earth-doped nanostructured phosphors into recycled silicate glass matrices. In this study, ceramic phosphors such as yttrium aluminum garnet (YAG) doped with  $\text{Eu}^{3+}$ ,  $\text{Dy}^{3+}$ , and  $\text{Sm}^{3+}$ , as well as  $\text{Dy}^{3+}$ -doped zinc aluminate ( $\text{ZnAl}_2\text{O}_4:\text{Dy}^{3+}$ ), were synthesized using a modified sol-gel method. Al, Y, Zn, Dy, Sm, and Eu nitrate salts were used as precursors and mixed with hexamethylenetetramine, which serves as the complexing agent. The reaction mixture was heated at 90 °C for 24 h in a sealed vessel, followed by drying at 200 °C and calcination between 900–1000 °C to obtain crystalline powders. Recycled glass was obtained by crushing commercial soda-lime bottles and milling the fragments to <44 μm. The phosphors were mixed with the glass powder and subjected to a brief thermal treatment at 800°C for 10 minutes to form the composites. Structural (XRD), morphological (SEM), and photoluminescence (PL) analyses were performed on the individual phosphors and the resulting PiG materials. To identify challenges and assess future perspectives, the photoluminescent behavior of the composites was evaluated under near-UV excitation using LED sources at 365 nm and 395 nm. This approach highlights the potential of combining luminescent nanomaterials with recycled waste to develop optical materials. The integration of rare-earth-doped phosphors into waste-derived glass hosts presents a promising route for utilizing sustainable raw materials in optoelectronic applications.



Organized by  
**UNITED** Scientific  
Group  
A non-profit organization

7<sup>th</sup> International Conference on  
**Materials Science and Engineering**

July 06-08, 2026 | Boston, MA | Hybrid

## **Session: Materials Design, Interfaces & Engineering Systems**

### **Numerical Simulations and In Situ Investigations of Oxide Nanotube Arrays**

Oomman K Varghese<sup>1,2\*</sup>

<sup>1</sup>*Department of Physics, University of Houston, Houston, Texas, USA*

<sup>2</sup>*Texas Center for Superconductivity, University of Houston, Texas, USA*

#### **Abstract**

Numerical simulations are widely used to predict the unique properties of materials. By systematically exploring a broad parameter space, they minimize the need for complex and resource-intensive experiments. More recently, emerging in situ experimental techniques have provided new opportunities to uncover novel material properties. Our in situ heating transmission electron microscopy (TEM) studies of titania nanotube array architecture revealed the formation of a three-phase structure when pristine nanotubes were heated from room temperature to 950 °C. Molecular Dynamics simulations demonstrated that high-energy ions can be channeled through the nanotubes and focused. This talk presents the methodology and key findings of these studies.



Organized by  
**UNITED** Scientific  
Group  
A non-profit organization

7<sup>th</sup> International Conference on  
**Materials Science and Engineering**

July 06-08, 2026 | Boston, MA | Hybrid

## Session: Materials Design, Interfaces & Engineering Systems

### Exascale Transport Simulations for the Understanding of the Switching Mechanism in Atomically Thin Memristors

Liangbo Liang<sup>1\*</sup>, Wenchang Lu<sup>2</sup>, Jameela Fatheema<sup>3</sup>, Emil Briggs<sup>2</sup>, Deji Akinwande<sup>3</sup>, Jerzy Bernholc<sup>2</sup>, Panchapakesan Ganesh<sup>1</sup>

<sup>1</sup>Center for Nanophase Materials Sciences, Oak Ridge National Laboratory, Oak Ridge, Tennessee 37831, USA

<sup>2</sup>Department of Physics, North Carolina State University, Raleigh, NC 27695, USA

<sup>3</sup>Microelectronics Research Center, The University of Texas at Austin, Texas 78758, USA

#### Abstract

Non-volatile resistive switching (NVRS) has emerged as an important concept in the development of high-density information storage and computing. The recent discovery of NVRS in two-dimensional (2D) monolayer structures, such as MoS<sub>2</sub> and hexagonal boron nitride (hBN), open a new avenue for memory/computing devices at the ultrathin scale. The fundamental switching mechanism in 2D monolayers, however, is not yet fully understood. It is hypothesized that vacancies in 2D monolayers mediate formation of conducting filamentary channels leading to a high to low resistance state. However, questions remain as to why the current on/off ratio is strongly device-dependent and vary significantly among different experimental works. To address these questions, it is highly desirable to simulate the electronic transport in a realistic device geometry using ab initio approaches for comparison with experimental data. This is rather challenging as quantum transport simulations are computationally demanding. Here, for the first time, we carried out electronic transport simulations of systems consisting of a hBN monolayer sandwiched by top and bottom gold electrodes with the number of atoms up to 3,600. These large transport simulations are made possible by implementing the non-equilibrium Green's function (NEGF) method in a highly scalable first-principles DFT code: the Real-space MultiGrid (RMG) that runs efficiently in the first exascale supercomputer, Frontier, at Oak Ridge National Laboratory. Systematic calculations reveal that experimental devices exhibit a wide range of on/off ratios ( $10^0$  to  $10^7$ ) due to variations in interface distances between the electrode and h-BN that significantly modulates the gold/h-BN wavefunction overlap. Our work provides a deeper understanding of the resistive switching mechanism in atomically thin memristors and demonstrates the significance of interface distance in governing the current on/off ratio.



Organized by  
**UNITED** Scientific  
Group  
A non-profit organization

7<sup>th</sup> International Conference on  
**Materials Science and Engineering**

July 06-08, 2026 | Boston, MA | Hybrid

## **Session: Materials Design, Interfaces & Engineering Systems**

### **Two-Way Shape Memory Polymers**

Guoqiang Li

*Department of Mechanical and Industrial Engineering, Louisiana State University, Baton Rouge, LA 70803, USA*

#### **Abstract**

Among shape memory polymers, two-way shape memory polymers — which can reversibly actuate in response to temperature changes — have attracted significant attention in recent years due to their broad potential applications, ranging from healthcare to aerospace. In this talk, I will present our research on two-way shape memory polymers conducted over the years, highlighting their use as artificial muscles, syntactic foams, and strain sensors. I will also discuss multifunctional two-way shape memory polymers, including those with properties such as 3D printability, low creep, flame retardancy, and recyclability.



Organized by  
**UNITED** Scientific  
Group  
A non-profit organization

7<sup>th</sup> International Conference on  
**Materials Science and Engineering**

July 06-08, 2026 | Boston, MA | Hybrid

## **Session: Materials Design, Interfaces & Engineering Systems**

### **Surface Engineering Design for Medical Device Biocompatibility**

Craig Rosenblum

*Himed, New York, USA*

#### **Abstract**

Surface treatment plays a crucial role in improving the biocompatibility and bioactivity of medical devices. Bioactive surface treatments are applied to medical devices to improve their interaction with biological tissues. These treatments can promote desired biological responses such as cell adhesion, tissue integration, and reduced inflammation. Medical device manufacturers are often tasked with the arduous feat of developing new and improved materials to enhanced the implant surface. This abstract provides an overview of various surface treatment techniques employed to enhance the performance of medical devices. Plasma spray coatings, such as MATRIX HA<sup>®</sup> (Hydroxyapatite) and MATRIX Ti<sup>®</sup> (Titanium), provide a biomimetic environment that encourages osseointegration and tissue regeneration. Surface modification techniques, including MATRIX MCD<sup>®</sup> and MATRIX Dual<sup>®</sup> texturing, alter surface topography using resorbable Apatitic Abrasive to promote cell attachment and tissue integration. Regulatory requirements and biocompatibility testing must be considered when developing and applying bioactive surface treatments to ensure the safety and efficacy of the devices. Collectively, these surface treatment approaches offer promising strategies to optimize medical devices for improved patient outcomes and enhanced medical interventions.



Organized by  
**UNITED** Scientific  
Group  
A non-profit organization

7<sup>th</sup> International Conference on  
**Materials Science and Engineering**

July 06-08, 2026 | Boston, MA | Hybrid

## **Session: Materials Design, Interfaces & Engineering Systems**

### **How to Build a “Bridge”? Nature’s Strategy for Connecting Hard and Soft Materials**

Benny Bar-On

*Department of Mechanical Engineering, Ben-Gurion University of the Negev, Israel*

#### **Abstract**

Load-bearing biological materials employ specialized bridging regions to connect material parts with substantially different mechanical properties (hard vs. soft). While such bridging regions have been extensively observed in diverse biomaterial systems that evolved through distinctive evolutionary paths—including arthropod parts, dental tissues, and marine threads—their mechanical origins and functional roles remain vague.

In my talk, I introduce a hypothesis that these bridging regions have primarily formed to minimize the near-interface stress effects between the connected material parts, preventing their splitting failure, and obtain a simple theoretical law for the optimal mechanical properties of such bridging regions. I demonstrate this principle through Finite Element simulations and physical experiments on a model synthetic-material system and verify its predictability for different biomaterial systems. The bridging principles of biological materials can be implemented into advanced material designs—paving the way to new forms of architected materials and composite structures with extreme load-bearing capabilities.



Organized by  
**UNITED** Scientific  
Group  
A non-profit organization

7<sup>th</sup> International Conference on  
**Materials Science and Engineering**

July 06-08, 2026 | Boston, MA | Hybrid

## Session: Materials Design, Interfaces & Engineering Systems

### Thin-Film Thickness Effects on the Optical Properties of AgAlx Alloys

Connor Lin, Ryan Lin, Guowen Ding\*

*Labforinvention Corp., 975 Corporate Way, Fremont, California 94539, USA*

#### Abstract

Accurate refractive-index (RI) data are vital for developing novel optical applications, yet those RI of most thin-film metal alloys remain unknown and difficult to predict because they vary strongly (up to 100 times) with deposition conditions and film microstructure. Our laboratory published a model that uses RI ratios to reduce the influence of these factors and predicts the RI of silver alloys from pure-silver data, alloy composition, and resistivity. However, the influence of film thickness on its predictive limits remains unquantified.

This study evaluates the model's predictive accuracy for silver-aluminum (Ag-Al<sub>x</sub>) alloy thin films deposited via magnetron sputtering across a varying range of deposition thicknesses. Our experimental data identifies a critical thickness threshold where the alloy's electrical and optical properties stabilize: below this threshold, on the thinner side, resistivity increases as the film becomes thinner, while beyond it, the resistivity remains generally flat, converging to a consistent bulk-like value. By mapping the correlation between film thickness, alloy concentration, and the resulting RI (n and k), we establish a predictive baseline for Ag-Al<sub>x</sub> alloy applications that significantly improves upon the limitations of existing models. The results provide a more reliable basis for estimating the optical properties of Ag-Al<sub>x</sub> alloy films and for designing optical coatings with controlled electrical and optical performance.



Organized by  
**UNITED** Scientific  
Group  
A non-profit organization

7<sup>th</sup> International Conference on  
**Materials Science and Engineering**

July 06-08, 2026 | Boston, MA | Hybrid

## **Session: Materials Design, Interfaces & Engineering Systems**

### **Zero Harm and Higher Efficiency: Readiness, Reception, and Control of Autonomous Haulage Systems in Mining**

Mabel Obosu

*Missouri University of Science and Technology, MO, USA*

#### **Abstract**

Autonomous Haulage Systems (AHS) are redefining surface mining operations by enhancing safety, improving efficiency, and minimizing human exposure to hazardous environments. This paper investigates the industry's readiness for AHS adoption, evaluates the reception of these systems by operators, supervisors, and stakeholders, and analyzes the technological and operational control mechanisms that support AHS deployment. Through a synthesis of case studies and recent implementations, the study outlines safety improvements, productivity gains, and cost optimization enabled by AHS. It also addresses key challenges, including infrastructure requirements, change management, regulatory compliance, and interoperability. The findings underscore AHS as a strategic enabler of zero harm and sustainable mining performance.



Organized by  
**UNITED** Scientific  
Group  
A non-profit organization

7<sup>th</sup> International Conference on  
**Materials Science and Engineering**

July 06-08, 2026 | Boston, MA | Hybrid

## Poster Session

### Investigation of Mechanical Performance in Different Metal Additive Manufacturing Processes

Yao-Tsung Lin

*Graduate Institute of Precision Manufacturing, National Chin-Yi University of Technology, No. 57, Section 2, Zhongshan Road, Taiping District, Taichung 411030, Taiwan*

#### Abstract

Metal Additive Manufacturing (AM) fabricates metal components through a layer-by-layer deposition process. Compared with conventional machining or casting methods, AM offers several advantages, including greater design flexibility, improved material utilization, and rapid manufacturing capabilities. Consequently, it enables the production of complex structures that are difficult to achieve using traditional subtractive metal manufacturing techniques. In recent years, metal AM has been widely applied in aerospace, medical and biomedical engineering, and automotive industries. However, during the metal additive manufacturing process, process parameters have a direct influence on melt pool stability and the quality of the fabricated parts. Improper parameter selection may result in defects such as porosity, lack-of-fusion defects, and microcracks in the printed components. These defects can significantly reduce the mechanical strength and fatigue life of the parts, particularly in high-strength alloys and stainless steel materials. Among stainless steels, 420 stainless steel exhibits good hardness, excellent wear resistance, and moderate corrosion resistance. Therefore, it has been widely used in molds and various industrial components. In this study, tensile specimens of 420 stainless steel were fabricated using different process parameters to evaluate the resulting mechanical properties. The experimental results indicate that when the laser power was set to  $300 \pm 50$  W, the laser scanning speed to  $800 \pm 50$  mm/s, and the hatch spacing to  $100 \mu\text{m}$ , the printed parts demonstrated improved densification and enhanced tensile strength.



Organized by  
**UNITED** Scientific  
Group  
A non-profit organization

7<sup>th</sup> International Conference on  
**Materials Science and Engineering**

July 06-08, 2026 | Boston, MA | Hybrid

## Poster Session

### Overcoming Analytical Barriers in Dense Oxides: High-Resolution Chemical and Dopant Mapping of Ce-Doped Multi-Layer Garnet Films by Ga<sup>+</sup> Focused Ion Beam TOF-SIMS

Amir Pourjafar<sup>1\*</sup>, Jack Elia<sup>2</sup>, Miroslaw Batentschuk<sup>2</sup>, Christoph J. Brabec<sup>2</sup>, Rajkumar Reddy Kolan<sup>1</sup>, George Sarau<sup>1</sup>, Silke Christiansen<sup>1</sup>, Vitalii Gorbenko<sup>3</sup>, Yuriy Zorenko<sup>3</sup>

<sup>1</sup>Fraunhofer Institute for Ceramic Technologies and Systems (IKTS), Germany

<sup>2</sup>Friedrich-Alexander-Universität, Germany

<sup>3</sup>Kazimierz Wielki University, Poland

#### Abstract

We report the detection and spatial mapping of dopant-related secondary ion signals in single-crystalline cerium-doped lutetium aluminum garnet (Lu<sub>3</sub>Al<sub>5</sub>O<sub>12</sub>:Ce, LuAG:Ce) films grown by liquid-phase epitaxy (LPE), using gallium ion (Ga<sup>+</sup>) focused ion beam time-of-flight secondary ion mass spectrometry (FIB-TOF-SIMS). LuAG:Ce is a dense garnet oxide used in scintillation, phosphor, and laser devices, where nanoscale dopant distribution influences optical performance. Its high resistivity, chemical complexity, and sputtering resistance make nanoscale dopant analysis challenging.

Under Ga<sup>+</sup> primary ion bombardment, we obtained clear secondary ion signals from the garnet matrix, including Ce<sup>+</sup>, Lu<sup>+</sup>, and oxide fragments (e.g., CeO<sup>+</sup>, LuO<sup>+</sup>). Sub-micrometer spatial resolution revealed relative dopant variations at growth-related features and interfaces without conductive coatings or extensive surface preparation. Local Ga implantation reduced charging sufficiently for stable image acquisition while preserving matrix-specific spectral features.

These results establish Ga<sup>+</sup> FIB-TOF-SIMS as a viable method for high-resolution dopant mapping and microstructural characterization in thick epitaxial oxide films, complementing electron microscopy in the study of garnet-based photonic and scintillation materials.



Organized by  
**UNITED** Scientific  
Group  
A non-profit organization

7<sup>th</sup> International Conference on  
**Materials Science and Engineering**

July 06-08, 2026 | Boston, MA | Hybrid

## Poster Session

### Process for Preparing $Y_2Si_2O_7$ Coating Using Sol-Gel Solution and Oxyacetylene Flame

Emmanuel Calva-Zamora<sup>1\*</sup>, Fernando Juárez-López<sup>1\*\*</sup>, Ángel Morales-Ramírez<sup>2</sup>, Rubén Cuamatzi-Meléndez<sup>3</sup>

<sup>1</sup>Instituto Politécnico Nacional-CIITEC, 02250 Cd de Mexico, México

<sup>2</sup>Instituto Politécnico Nacional-ESIQIE, 07738 Cd de Mexico, México

<sup>3</sup>Instituto Mexicano del Petróleo, 07730 Cd de México, México

#### Abstract

This study focuses on the use of oxyacetylene flame thermal spraying with external injection of a sol-gel solution as a novel alternative for synthesizing yttrium silicate crystalline phases. Sol-gel solutions with different molar concentrations of Y/Si precursors were injected into the flame to obtain a coating on an IN718 substrate. The results showed that a 1:1 Y/Si precursor ratio in the solution promoted the formation of yttrium silicate scale, while a 5:5 Y/Si precursor ratio in the solution promoted a dense, low-porosity coating, but with the presence of microcracks on the substrate surface. This coating was composed of yttrium silicate with a monoclinic crystalline phase  $Y_2Si_2O_7$ , along with other secondary crystalline phases of  $Cr_2Ni_3$ , NiO, and Cr. All these findings support that a flame temperature of 2300 °C in the oxyacetylene flame thermal spraying process is the temperature required for sol-gel phase synthesis.



Organized by  
**UNITED** Scientific  
Group  
A non-profit organization

7<sup>th</sup> International Conference on  
**Materials Science and Engineering**

July 06-08, 2026 | Boston, MA | Hybrid

## Poster Session


### Hydrogen-Induced Defect Formation in Yttrium-Based Coatings for Dry Etching Processes

Jiyeon Baek\*, Minsung Kim, Seongeon Park, Kwanhui Jo, Jaekyu Ha, Daekeun Park, Sungkeun Won

*Foundry Business, Samsung Electronics, USA*

#### Abstract

As the critical dimensions of semiconductor devices shrink, especially for the sub-3nm node, dry etching processes increasingly employ complex hydrogen-containing plasma mixtures to achieve precise pattern control. Hydrogen plasma exposure can induce degradation of chamber coatings and the formation of yttrium-based particle defects, resulting in significant yield loss. This study investigates the material properties and microstructural design strategies of yttrium-based coatings to enhance hydrogen resistance and process stability. Hydrogen-induced defect formation was modeled as a function of materials phase and deposition conditions, and correlations between microstructural characteristics and plasma-induced degradation were evaluated. From a materials perspective, Y<sub>2</sub>O<sub>3</sub> and Y<sub>3</sub>Al<sub>5</sub>O<sub>12</sub> (YAG) coatings were experimentally assessed. Regarding deposition methods, commonly employed plasma-resistant coating techniques, including plasma spraying, aerosol deposition (AD), and physical vapor deposition (PVD), were systematically reviewed. Exposure to hydrogen-rich plasma revealed hydroxide formation, approximately 20nm in thickness, on Y<sub>2</sub>O<sub>3</sub> grains, while no transformation to a new crystalline phase was observed on YAG grains, as confirmed by crystallographic analysis. Concurrently, microstructural evaluation demonstrated that PVD coatings minimize pores and reactive species diffusion paths, effectively mitigating plasma-induced degradation. These observations confirm that PVD YAG is a promising candidate for suppressing hydrogen-induced particle formation and enhancing the durability of etch chamber components in sub-3nm node dry etching processes. The results provide a mechanistic understanding of hydrogen plasma-coating interactions and strategies for the optimized design of plasma-resistant chamber coatings.



We wish to see you again at  
**MATERIALS-2027**

July 12-14, 2027 | Boston, MA

Organized by



**UNITED** Scientific  
Group  
A non-profit organization

**USG United Scientific Group**  
(A non-profit organization)

8105 Rasor Blvd, Suite 112, PLANO, TX 75024, USA

Tel: +1-469-854-2280/81; Toll Free: +1-844-395-4102 Fax: +1-469-854-2278

Email: [materials@uniscigroup.net](mailto:materials@uniscigroup.net); Web: <https://materials.unitedscientificgroup.org/>